

PARAMETERS ANALYSIS & STUDY OF AN ARROW SHAPED PATCH ANTENNA IN INCREASING SLOTS MODE KEEPING INPUT PARAMETERS CONSTANT

Dr. Abhishek Tripathi
IIT Kharagpur (W.B.) India

Anupam Vyas
SRGI Jhansi(U.P.),India

I INTRODUCTION

Microstrip antenna consists of a radiating patch of any planar geometry (e.g. Circular, square, Ellipse, ring and rectangular) on one side of a dielectric material substrate backed by a ground plane on the other side. It has some advantages such as light weight, low cost etc. and some disadvantages such as low bandwidth low gain. My

methodology is to improve the performance of patch antenna by introducing slots in its cross-section and analyzing the effects. IE3D software is used as simulator and study to generate a conclusion that what will happen with the important antenna parameters if in any antenna slots are increased at different positions. The discussion will start from the basic geometry of the antenna; I have taken an arrow shaped antenna for this practice

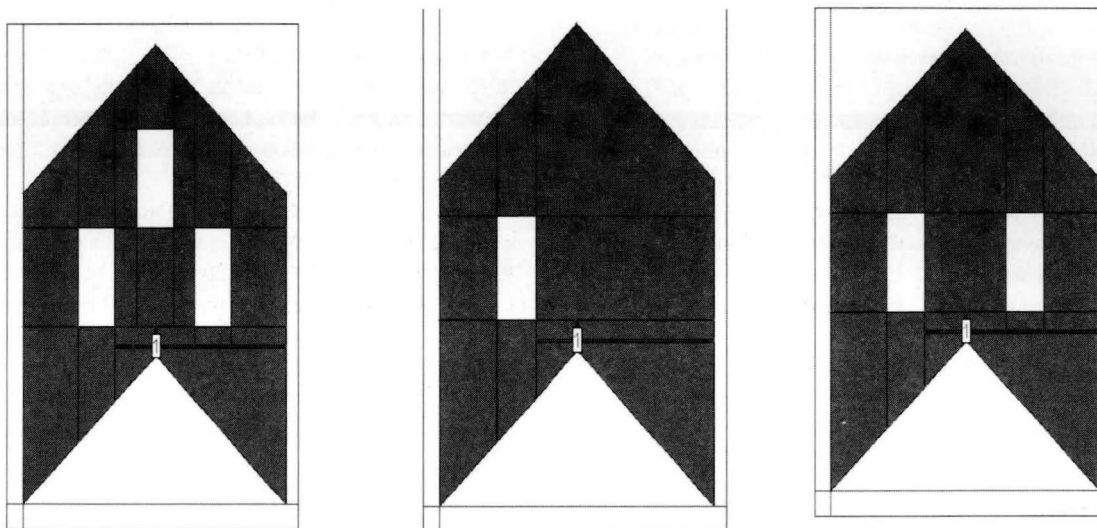


Figure 1: Single slot arrow shape MSA **Figure 2:** Double slot arrow shape MSA **Figure 3:** Triple slot arrow shape MSA

Figure 1, Figure 2 and Figure 3 are representing the three samples and they are taken for analysis in this paper. The coordinates of this basic arrow shape in which have dig these holes, starting from origin (0,0) are (18.06,15), (36.12,0), (36.12,31.51), (18.06,46.51) and

(0.31,51). The feed Point is given as (18,16) and then by simulation on IE3D following results are generated and compared, Figure 4, 5 and 6 show the value of return loss of antennas.

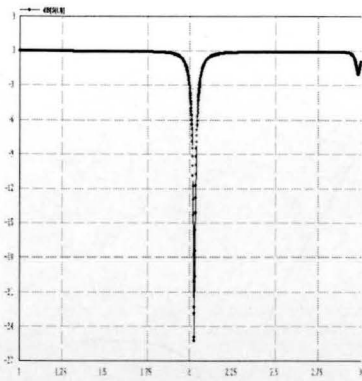


Figure 4 : Return Loss Graph of Single slot arrow shape MSA

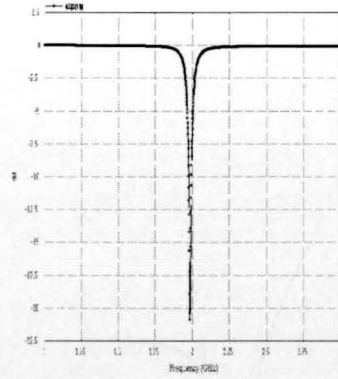


Figure 5: Return Loss Graph of Double slot arrow shape MSA

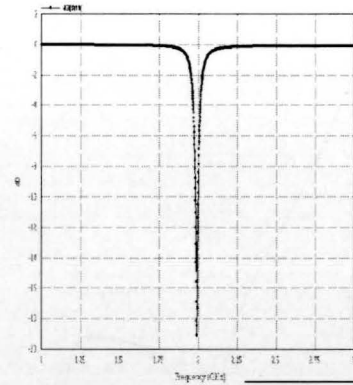


Figure 6 : Return Loss Graph of triple slot arrow shape MSA

Smith chart of each antenna has been drawn as show in the figures 7,8 & 9.

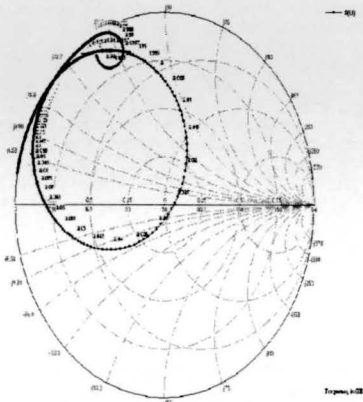


Figure 7: Smith Chart of Single slot arrow shape MSA

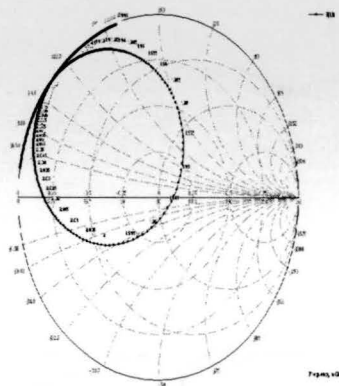


Figure 8: Smith Chart of Double slot arrow shape MSA

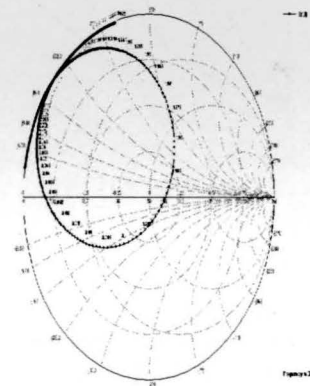


Figure 9 :Smith Chart of Triple slot arrow shape MSA

VSWR Graphs of the slotted arrow shaped antenna have been drawn at figure 8,9,and10.

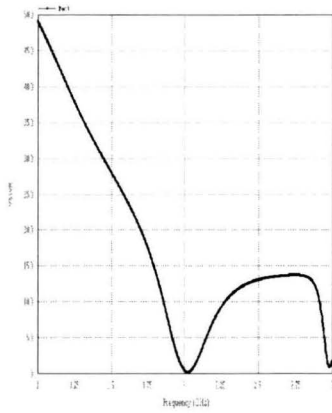


Figure 8

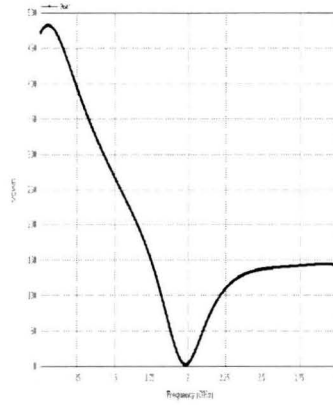


Figure 9

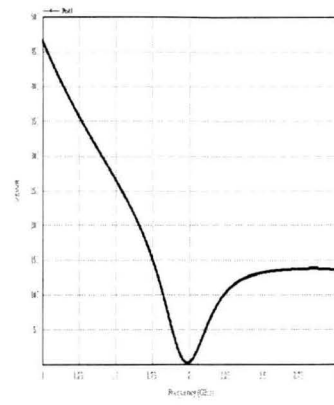


Figure 10

Both Real and Imaginary parts of S-Parameters of antennas as generated by IE3D respectively are shown figure 11to 16

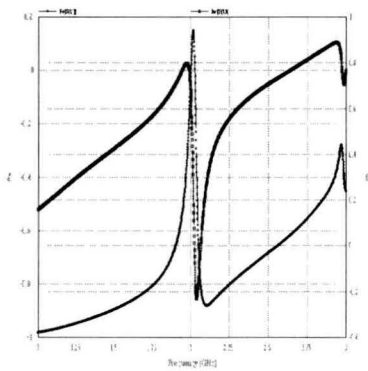


Figure 11

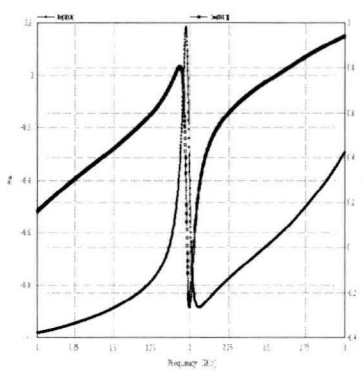


Figure 12

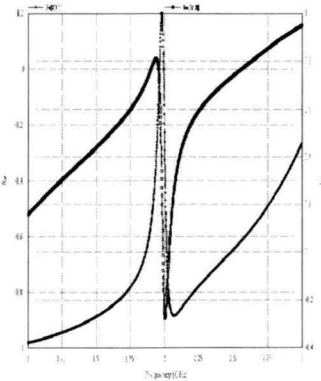


Figure 13

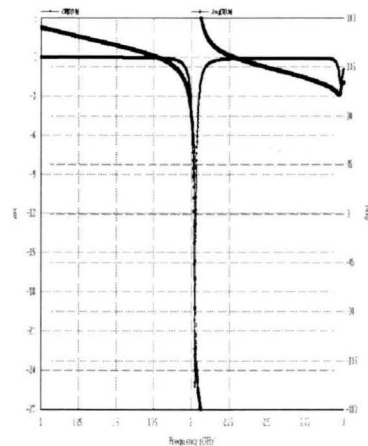


Figure 14

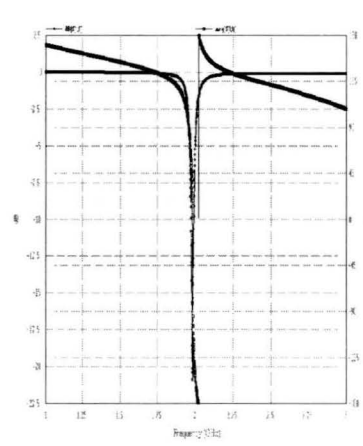


Figure 15

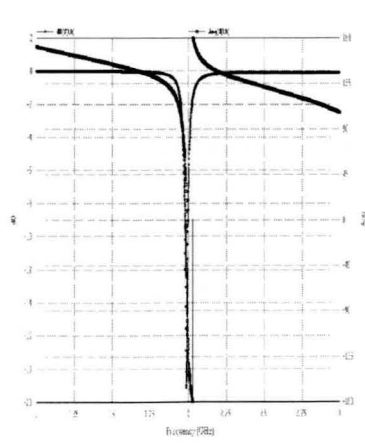


Figure 16

II CONCLUSION

By putting the graphs parallel to each other it can be seen that for the parameters which we worked the change in response of one slot antenna and two slot antenna was quite clear but if the third hole was made then there very less change in antenna parameters response, it is also expected that if the forth hole is made then the response change will become very vey less. For succeed hole response change will be in significant.

REFERENCES

[1] C.A. Balanis, "*Antenna Theory analysis and design*", Microstrip Antenna, Chapter 14, pp.720-784

[2] Wang Yazhou, Su Donglin, Xiao Yongxuan, "*Broadband circularly Polarized square microstrip antenna*", paper appear in ISAPE ,Guilin, 7th international symposium,published on 26-29 october 2006,pp.1-4.

[3] K.Shambavi , "*Gain and Bandwidth Enhancement Technique in Square Microstrip Antenna for WLAN application*", Asia-Pacific Microwave Conference 2007,pp.4284-4287.

[4] Ali Akdagli, "*Improved Formula For The Resonent Frequencies of Dual Frequency Arrow Shaped Microstrip Antenna*" Volume 50, MOTL No.1 January 2008.